

Zener Diodes



Features

- High reliability
- Very sharp reverse characteristic
- Low reverse current level
- Zener Voltage 2.4V~36V

Mechanical Data

- **Package:** SOT-23
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Limiting Values (Absolute Maximum Rating, Ta=25°C Unless otherwise specified)

Characteristic	Symbol	Value	Units
Maximum Forward Voltage@I _F =10mA	V _F	0.9	V
Power Dissipation	P _D	350	mW
Peak Forward Surge Current*	I _{FSM}	2.0	A
Thermal Resistance	R _{thJA}	357	°C /W
Operation Temperature	T _J	-55~+150	°C
Storage Temperature Range	T _{STG}	-55~+150	°C

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BZX84B2V4 THRU BZX84B36	F2	Approximate 0.008	3000	30000	120000	7" reel



BZX84B2V4 THRU BZX84B36






■Electrical Characteristics (T_a=25°C Unless otherwise specified)

Type Number	Marking Code	Nominal Zener Voltage			Maximum Zener Impedance				Max Reverse Leakage Current		Typical Temperature Coefficient @I _{ZTC}	
		V _Z (V) at I _{ZT} =5mA			Z _{ZT} (Ω)@I _{ZT}		Z _{ZK} (Ω)@I _{ZK}		I _R (μA) @ V _R			
		Min.	Typ.	Max.	Max	I _{ZT} (mA)	Max	I _{ZK} (mA)	Max	V _R (V)	mV/°C	
BZX84B2V4	Z11.	2.34	2.4	2.46	100	5	600	1	45	1	-3.5	0
BZX84B2V7	Z12.	2.63	2.7	2.77	100	5	600	1	20	1	-3.5	0
BZX84B3V0	Z13.	2.92	3.0	3.08	100	5	600	1	10	1	-3.5	0
BZX84B3V3	Z14.	3.21	3.3	3.39	95	5	600	1	15	1	-3.5	0
BZX84B3V6	Z15.	3.52	3.6	3.67	95	5	600	1	15	1	-3.5	0
BZX84B3V9	Z16.	3.82	3.9	3.98	95	5	600	1	10	1	-3.5	0
BZX84B4V3	Z17.	4.21	4.3	4.39	95	5	600	1	3	1	-3.5	0
BZX84B4V7	Z1.	4.61	4.7	4.79	80	5	500	1	3	2	-3.5	0.2
BZX84B5V1	Z2.	5.0	5.1	5.2	60	5	480	1	2	2	-2.7	1.2
BZX84B5V6	Z3.	5.49	5.6	5.71	40	5	400	1	1	2	-2.0	2.5
BZX84B6V2	Z4.	6.08	6.2	6.32	10	5	150	1	3	4	0.4	3.7
BZX84B6V8	Z5.	6.66	6.8	6.94	15	5	80	1	2	4	1.2	4.5
BZX84B7V5	Z6.	7.35	7.5	7.65	15	5	80	1	1	5	2.5	5.3
BZX84B8V2	Z7.	8.04	8.2	8.36	15	5	80	1	0.7	5	3.2	6.2
BZX84B9V1	Z8.	8.92	9.1	9.28	15	5	100	1	0.5	6	3.8	7.0
BZX84B10	Z9.	9.8	10	10.2	20	5	150	1	0.2	7	4.5	8.0
BZX84B11	Y1.	10.78	11	11.22	20	5	150	1	0.1	8	5.4	9.0
BZX84B12	Y2.	11.76	12	12.24	25	5	150	1	0.1	8	6.0	10.0
BZX84B13	Y3.	12.74	13	13.3	30	5	170	1	0.1	8	7.0	11.0
BZX84B15	Y4.	14.7	15	15.3	30	5	200	1	0.1	10.5	9.2	13.0
BZX84B16	Y5.	15.68	16	16.3	40	5	200	1	0.1	11.2	10.4	14.0
BZX84B18	Y6.	17.6	18	18.4	45	5	225	1	0.1	12.6	12.4	16.0
BZX84B20	Y7.	19.6	20	20.4	55	5	225	1	0.1	14	14.4	18.0
BZX84B22	Y8.	21.56	22	22.44	55	5	250	1	0.1	15.4	16.4	20.0
BZX84B24	Y9.	23.52	24	24.5	70	5	250	1	0.1	16.8	18.4	22.0
BZX84B27	Y10.	26.46	27	27.54	80	5	300	1	0.1	18.9	21.4	25.3
BZX84B30	Y11.	29.4	30	30.6	80	5	300	1	0.1	21	24.4	29.4
BZX84B33	Y12.	32.34	33	33.7	80	5	325	1	0.1	23.1	27.4	33.4
BZX84B36	Y13.	35.28	36	36.72	90	5	350	1	0.1	25.2	30.4	37.4



BZX84B2V4 THRU BZX84B36


■ Characteristics (Typical)

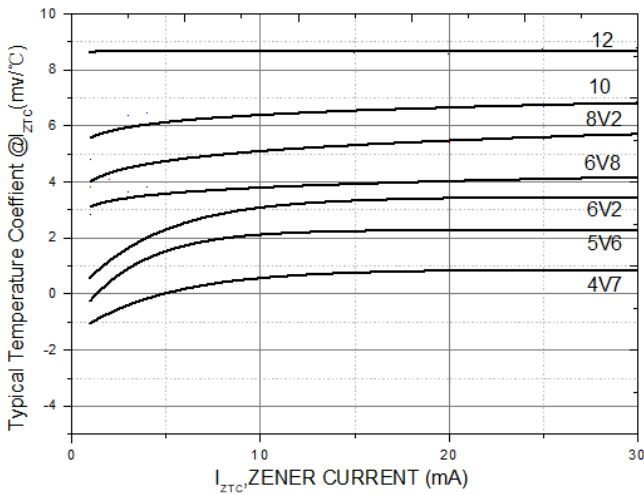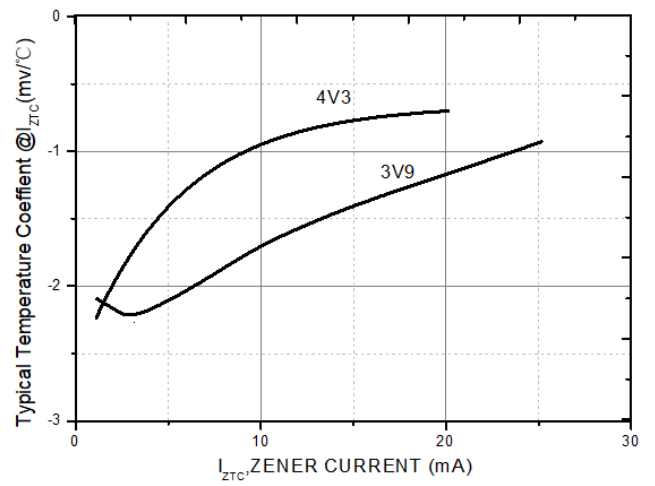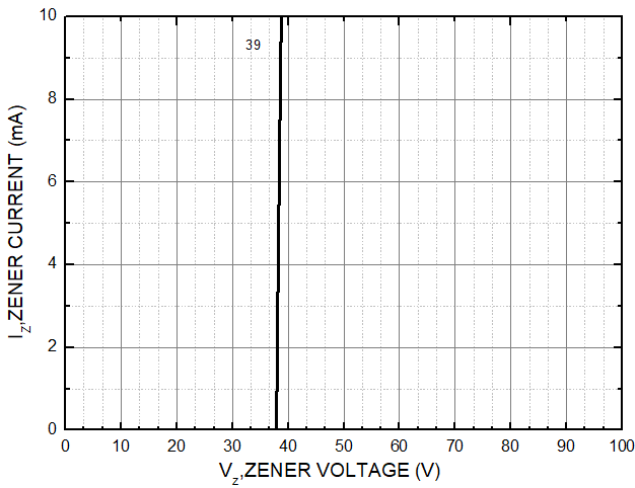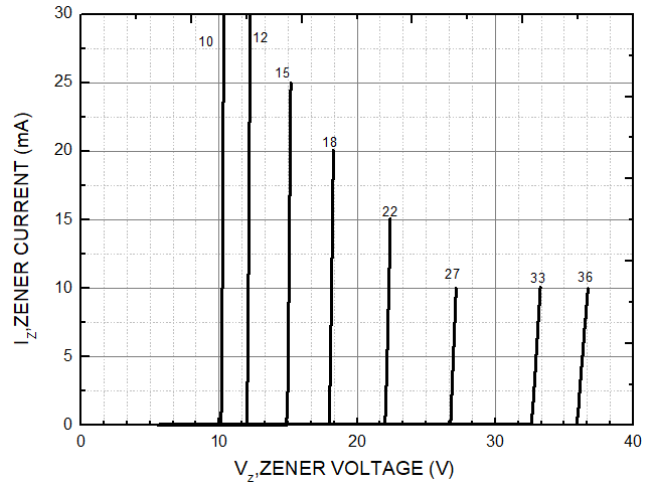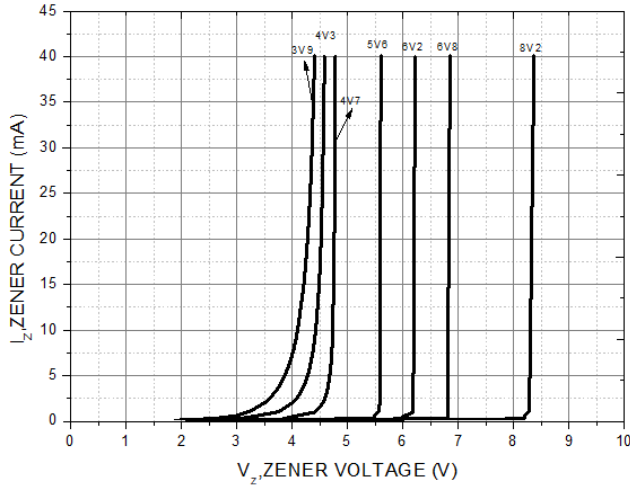




BZX84B2V4 THRU BZX84B36

■SOT-23 Package Outline Dimensions

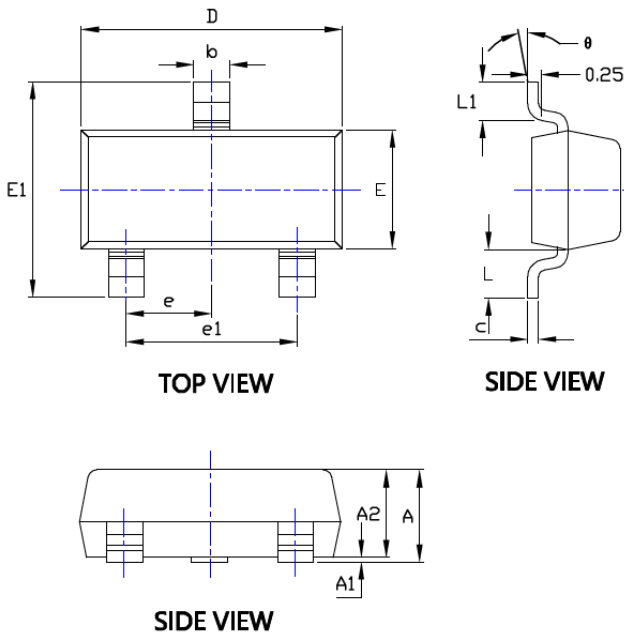

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.200	0.300	0.500
θ	0°	8°	0°	8°

■SOT-23 Suggested Pad Layout

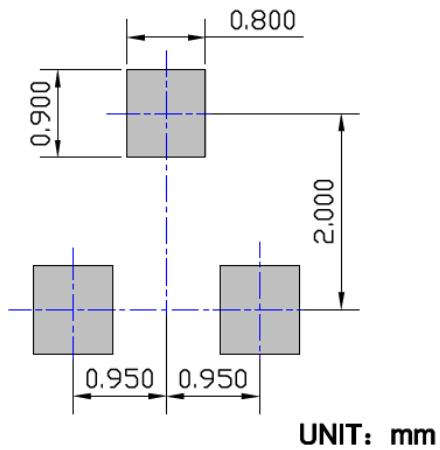



BZX84B2V4 THRU BZX84B36

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.